

Screed Replacement Tile


JUPITER



CRK | (021) | Rev 1
April 2012

■ 20mm load bearing surface

□ Screed Replacement Tile

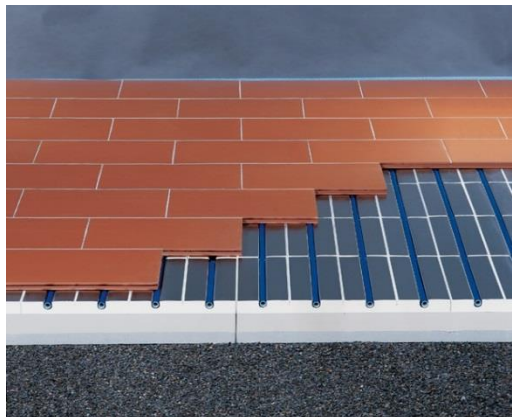

The JUPITER Screed Replacement Tile is a unique floating floor system comprised of tongue and groove ceramic tiles.

The tiles are adhered together in brick bond fashion on a slip membrane with supplied non-toxic cement based adhesive.

System requires only 36 hours to fully cure before heating system can be switched on and floor finish laid. No heating up protocol required.

Suitable for all floor finishes.

Product specification

Density $1150 \pm 100 \text{ kg/m}^3$

Thickness / tolerance (mm) 20

Unit dimensions (mm) 400 x 180

Tolerances (mm) Width ± 2 Length ± 2

Weight per m^2 (kg) 38

Fire class EN 13501: 2007 A1

Thermal resistance R ($\text{m}^2 \text{ K/W}$) 0,038

Thermal conductivity λ (W/mK) 0.67

Packaging

Pallet contents 336 units / 24m^2

Pallet dimensions (LxWxH mm) 1200 x 800 x 700

Pallet weight 900 kg

Product benefits

Easy to install – no specific knowledge required

5 kN point load

Tested deflection capability with stone floor I/240. 3 x better than BS I/720 requirement

No decoupling membrane required

No movement joints required up to 450m^2

Accepts any format tile / porcelain / stone – no maximum size

5 year warranty provided for tile / porcelain / stone floor finishes supplied and installed by others